




# Kettenkupplungen

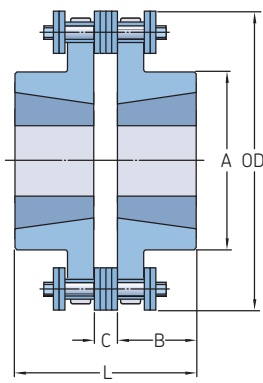

Bauart HH

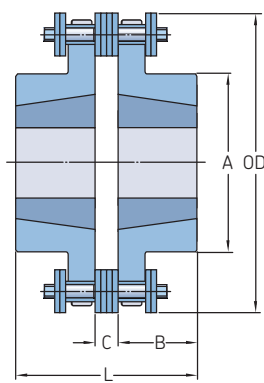

Bauart FF

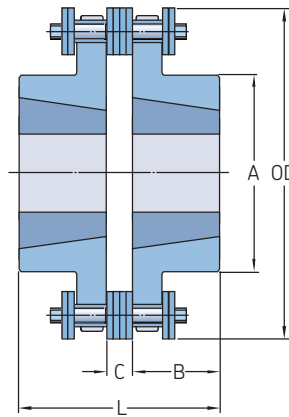

Bauart FH

Kupplungs- größe	Buchsen- nummer	Bohrung		Abmessungen				Gewicht		Drehzahl	Nenn- dreh- moment	Ketten- gewicht	Naben-Bestell-Nr			Fertiggebohrt
		Min.	Max.	A	B	C	L	OD	Glatte Bohrung				FTB	HTB		
-	-	mm						kg	Max.	U/min	Nm	kg	-	-	-	-
<b>0816</b>	- 1108	15,9 12,7	23,8 28,6	50,0 50,0	28,96 22,20	7,1 7,1	65,0 51,6	77,0 77,0	0,45 0,41	5 000 5 000	294 294	0,23 0,23	<b>PHE IS0816RSB</b>	-	-	PHE IS0816X...
													-	PHE IS0816FTB	PHE IS0816HTB	-
<b>1016</b>	-	15,9	42,9	63,5	36,88	9,5	83,3	96,0	1,00	4 000	559	0,54	<b>PHE IS1016RSB</b>	-	-	PHE IS1016X...
<b>1018</b>	- 1610	19,1 12,7	50,8 41,3	75,4 75,4	43,26 25,40	9,5 9,5	87,1 60,3	106,4 106,4	1,59 0,50	3 600 3 600	706 706	0,59 0,59	<b>PHE IS1018RSB</b>	-	-	PHE IS1018X...
													-	PHE IS1018FTB	PHE IS1018HTB	-
<b>1218</b>	-	25,4	61,9	88,9	47,60	11,1	106,3	127,0	2,27	3 000	1 333	1,00	<b>PHE IS1218RSB</b>	-	-	PHE IS1218X...
<b>1220</b>	- 2012	28,6 12,7	69,9 50,8	98,4 98,4	50,80 31,80	11,1 11,1	112,7 74,6	139,7 139,7	2,95 1,23	2 500 2 500	1 559 1 559	1,18 1,18	<b>PHE IS1220</b>	-	-	PHE IS1220X...
													-	PHE IS1220FTB	PHE IS1220HTB	-
<b>1222</b>	-	28,6	76,2	114,3	54,00	11,1	119,1	151,2	4,31	2 500	1 794	1,23	<b>PHE IS1222RSB</b>	-	-	PHE IS1222X...
<b>1618</b>	-	28,6	79,4	115,9	60,70	14,7	136,1	169,1	4,99	2 000	2 961	2,40	<b>PHE IS1618RSB</b>	-	-	PHE IS1618X...
<b>1620</b>	- 3020	38,1 23,8	90,5 76,2	136,5 136,5	66,10 50,00	14,7 14,7	146,9 116,3	185,3 185,3	7,40 2,77	2 000 2 000	3 579 3 579	2,68 2,68	<b>PHE IS1620RSB</b>	-	-	PHE IS1620X...
													-	PHE IS1620FTB	PHE IS1620HTB	-
<b>2018</b>	-	38,1	98,4	144,5	70,90	18,3	160,1	211,5	9,21	1 800	4 981	4,45	<b>PHE IS2018RSB</b>	-	-	PHE IS2018X...
<b>2020</b>	- 3535	38,1 30,2	117,5 88,9	170,7 170,7	79,80 88,90	18,3 18,3	177,9 196,1	231,8 231,8	14,43 8,62	1 800 1 800	6 688 6 688	4,95 4,95	<b>PHE IS2020RSB</b>	-	-	PHE IS2020X...
													-	PHE IS2020FTB	PHE IS2020HTB	-
<b>2418</b>	-	50,8	119,1	171,5	88,30	21,8	198,4	254,0	16,70	1 500	10 032	7,85	<b>PHE IS2418RSB</b>	-	-	PHE IS2418X...
<b>2422</b>	-	50,8	155,6	222,3	102,10	21,8	226,0	302,0	31,76	1 200	12 993	9,62	<b>PHE IS2422RSB</b>	-	-	PHE IS2422X...