

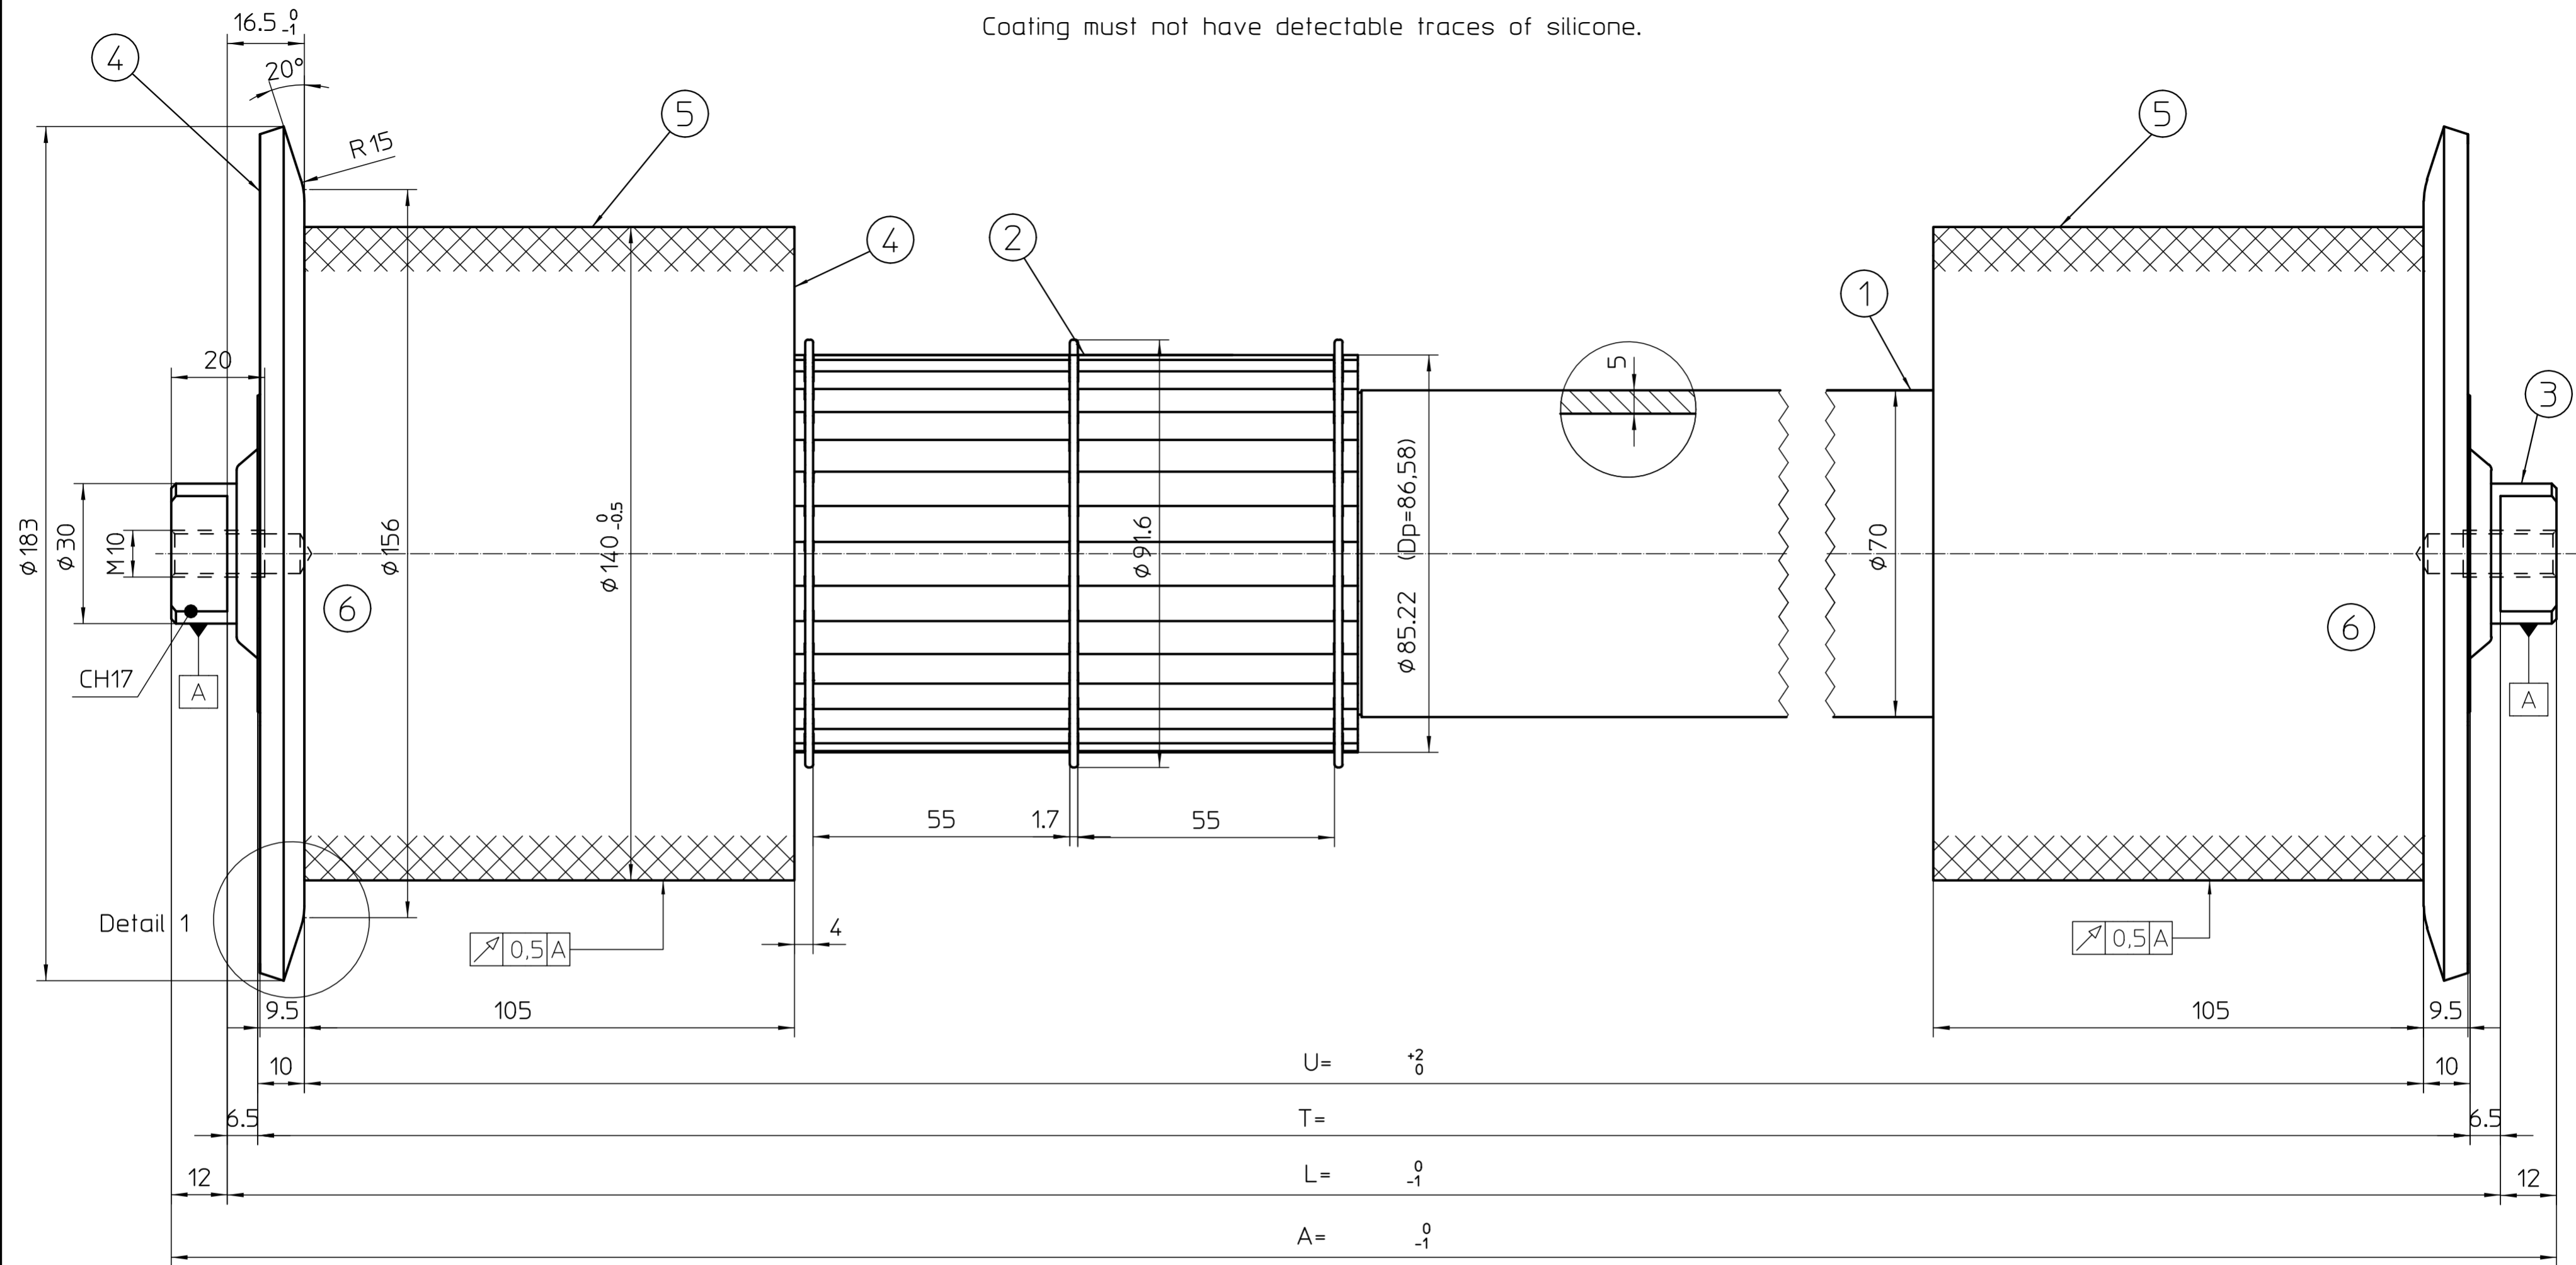


Coating must not have detectable traces of silicone.

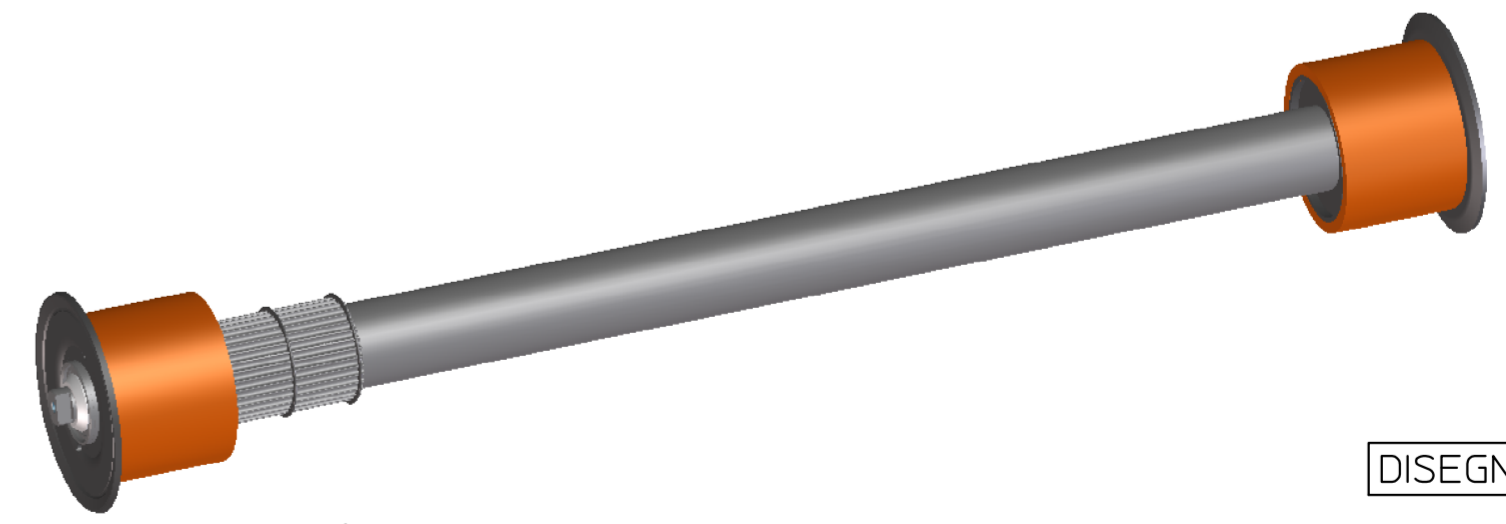

1	Tube dia. 70x5 mm EN 10025-S235 or similar/higher.
2	Pulley Z34 HTD 8M-50 Dp=86.58 De=85.22 EN10025-S235 JRG2 and snap rings SP85 DIN 5417 with rounded edge.
3	Axle dia. 30 mm EN 10025-S235 JRG2 with threaded holes M10x20 and milled ends dim. 17x12 mm.
4	Flange dia. 183x6 (hardened) and flange dia. 112x5 mm made by EN 10111 DD11 or similar/higher.
5	Polyurethane coating hardness 95 +/-3 Shore A.
6	Single row rigid radial precision bearings type 6206-2RS lifetime lubrication.

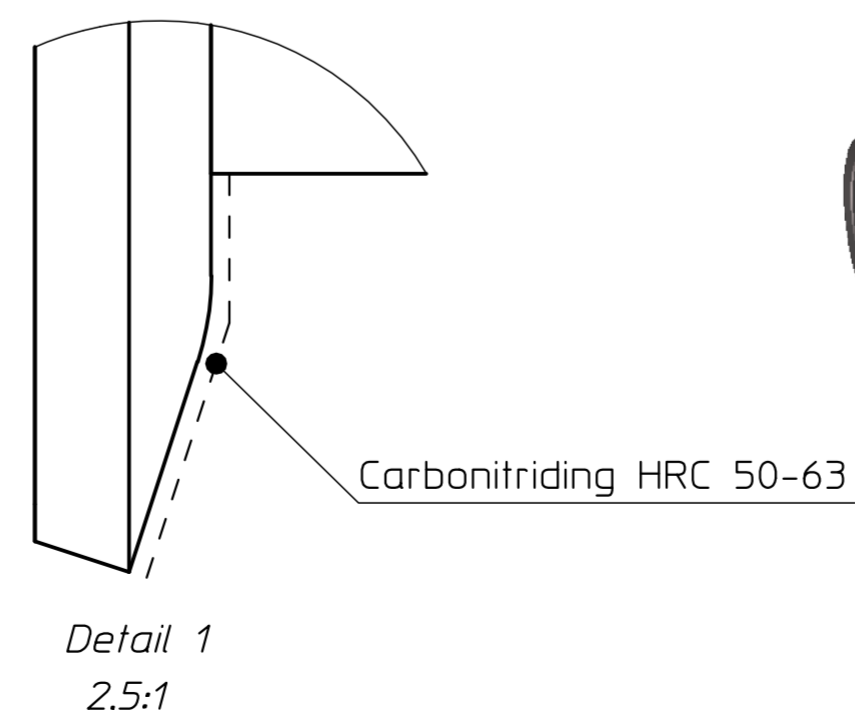

DISEGNO CLIENTE

DESCRIZIONE ULTIMA MODIFICA		ESEGUITA	APPROV.
01	Modifica TY e aggiornamento puleggia.	Pace	Anglieri
DENOMINAZIONE		TOLLERANZE DIM. E FORMA:	
D140/70/30 Z34 HTD8M-50 DRIVEN ROLLER		T268-01-00 T268-03-00	
POLYURETHANE COATED-DE183 HARDENED FLANGES		SALDATURE: -	
MODIFICHE		DATA	
DIS. Rizza		DATA	SCHEDA N°
CONTR. Rizza	APPROV. Pace	A 30/01/17	4059
SCALA 1:1	PESO -	00 08/02/17	4059
FORM. A2		01 21/04/17	4076
DIS.N. 329855V			
SOSTITUISCE 329-42V			