

(/News/Index/en-US/337/)

[Click Here For Technical](#)

Klemsan®

 (/Home/Index/en-US/0/)


Product Name / Product Code / Type / Color

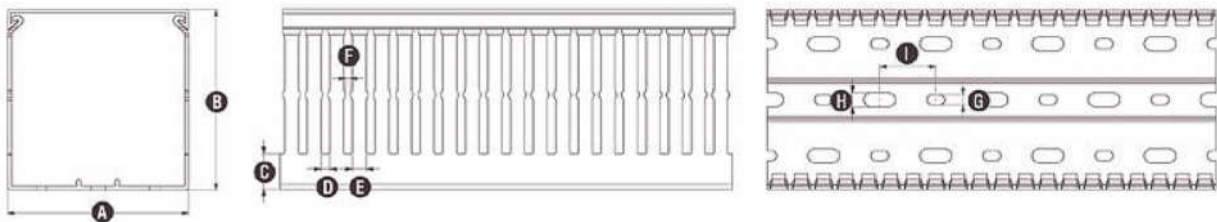
SEARCH

[HOME \(/home\)](#)
[SITE MAP \(/site-map\)](#)
[CONTACT \(/contact-klemsan\)](#)

Wiring Ducts and Accessories ▾ > Wiring Ducts ▾

> Narrow Slotted (6 - 4 mm) (/ProductCat/en-US/639/)

	<p>551020 KKC 8080</p> <p>80x80 Slotted wiring duct,Grey</p>	<p>Print</p> <hr/> <p>Share</p> <hr/> <p>Request More Info</p> <hr/> <p>Add To Favorites</p> <hr/> <p>Add To Compare List</p>
--	---	---

[Technical Info](#)
[Accessories](#)
[Certificates](#)
[Order Info](#)


General Product Information	Insulating material	PVC - UL 94 V0
Operating Temperature	Minimum Temperature	-15°C
Dimensions	A	80 mm
Operating Temperature	Maximum Temperature	+60°C
Dimensions	B	80 mm

	C	15,8 mm
	D	4 mm
	E	6 mm
	F	2,1 mm
	G	4,5 mm
	H	6,5 mm
	I	25 mm
Length	U	2 Mt.
Pack Quantity		12x2 mt

Filter Search

Models ▾

Colors ▾

© 2014 Klemsan A.Ş. [Site Policy \(/site-policy\)](/site-policy/) | [Site Map \(/site-map\)](/site-map/)

[Subscribe to Our Newsletter](#)

(http(http:

* WELCOME TO OUR NEW WEBSITE. Data updating process is still going on. Thank you for your understanding.