

Descrizione

209694FA01684A989FC7995A6929C09A .ExternalClass p.MsoNormal, 209694FA01684A989FC7995A6929C09A .ExternalClass li.MsoNormal, 209694FA01684A989FC7995A6929C09A .ExternalClass div.MsoNormal {margin-top:0cm;margin-right:0cm;margin-bottom:10.0pt;margin-left:0cm;line-height:115%;font-size:11.0pt;font-family:Calibri;}209694FA01684A989FC7995A6929C09A .ExternalClass .MsoChpDefault {font-size:11.0pt;font-family:Calibri;}209694FA01684A989FC7995A6929C09A .ExternalClass .MsoPapDefault {margin-bottom:10.0pt;line-height:115%;}209694FA01684A989FC7995A6929C09A .ExternalClass div.WordSection1 {}

3-pistonalternating volumetric pumps for use on cleaning units and industrial systems.

Can be coupled to various types of motors, directly or with flexible joint.

Pump body and cover in die-cast aluminium alloy.

Rear cover with oil drain outlet and sight glass.

Pistons driven by crank-connecting rod mechanism.

Pump shaft in pressed high-strength steel.

Oversized friction bearings.


Bronze connecting rods.

One-piece ceramic pistons.

Pump head in nickel-plated brass.

Double gasket sealing system (PTFE).

Intake and delivery valves have plugs for easier maintenance.

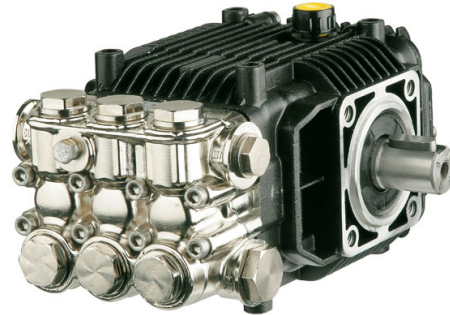

Details	Value
Category	Hot Water 85°C
Series	178 - XHW
Pump type	XHW 11.17 N
Versioning	N
ARCode	22543
Output (lt/min)	11
Output (gpm)	2.90
Pressure (bar)	170
Pressure (psi)	2500
Power (hp)	5
Power (kw)	3,7
RPM	1450