



## Short description



- Height adjustable foot
- Easy installation
- Nickel plated alloy steel
- Can be used with Load Cell models: H8C, B8D and BM8D

## Available models


Model	Capacity	Full article description	Part number
HJ-8-201	0.1t – 2t	HJ-8-201-0.1t/2t	2080010
	2.5t – 5t	HJ-8-201-2.5t/5t (M18x1.5)	2080020
	2.5t – 5t	HJ-8-201-2.5t/5t (M20x2.5)	2080021
	10t	HJ-8-201-10t	2080050
	0.25klb – 5kSE	HJ-8-201-1/4K	2080030
	5klb – 10klb	HJ-8-201-5/10K	2080040

## Detailed specifications HJ-8-201

Capacity	0.1t – 2t	2.5t – 5t	2.5t – 5t	10t	0.25klb-5kSE	5klb – 10klb
Maximum vertical force (down)	30kN	70kN	70kN	130kN	30kN	70kN
Maximum horizontal movement	+1 / -1 mm	+1 / -1 mm	+1 / -1 mm	+1 / -1 mm	+1 / -1 mm	+1 / -1 mm

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Dimensions in mm (inch)

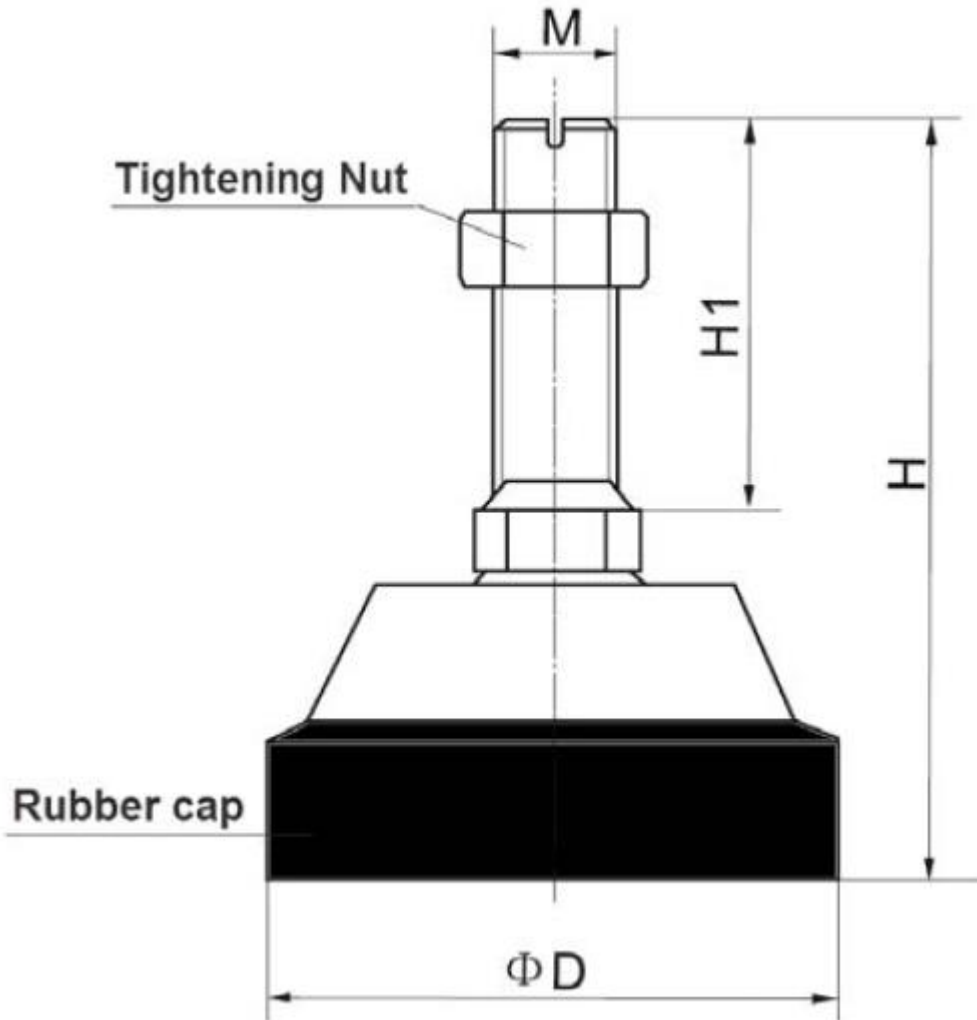

Dimension Type	Capacity	$\Phi D$	H	H1	M
HJ-8-201	0.1t – 2t	60	92	50	M12 x 1.75
	0.25klb – 5kSE	(2.36)	(3.62)	(1.97)	1/2-20UNF
	2.5t – 5t	80	105	50	M18 x 1.5
	2.5t – 5t	80	105	50	M20 x 2.5
	5klb – 10klb	(3.15)	(4.13)	(1.97)	1/4-16UNF
	10t	86	112	50	M24 x 2

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.