


THE METERING ELEMENTS ARE FITTED ON THE BASE BY MEANS OF TWO FIXING SCREWS SUPPLIED.

METERING ELEMENTS

- These are available in a wide range of deliveries
- A by-pass element is also available which allows an addition or reduction of lubrication points at any time without disconnecting the pipes. The by-pass element cannot be fitted in a three element assembly.
- Bridge elements have been introduced. These interconnect and discharge into the next element.
- Also available metering elements with: micro switch; reed switch; reed switch pin indicator; reed switch + pin indicator and proximity switch.
- Minimum of 3 working sections per distributor assembly must be used.

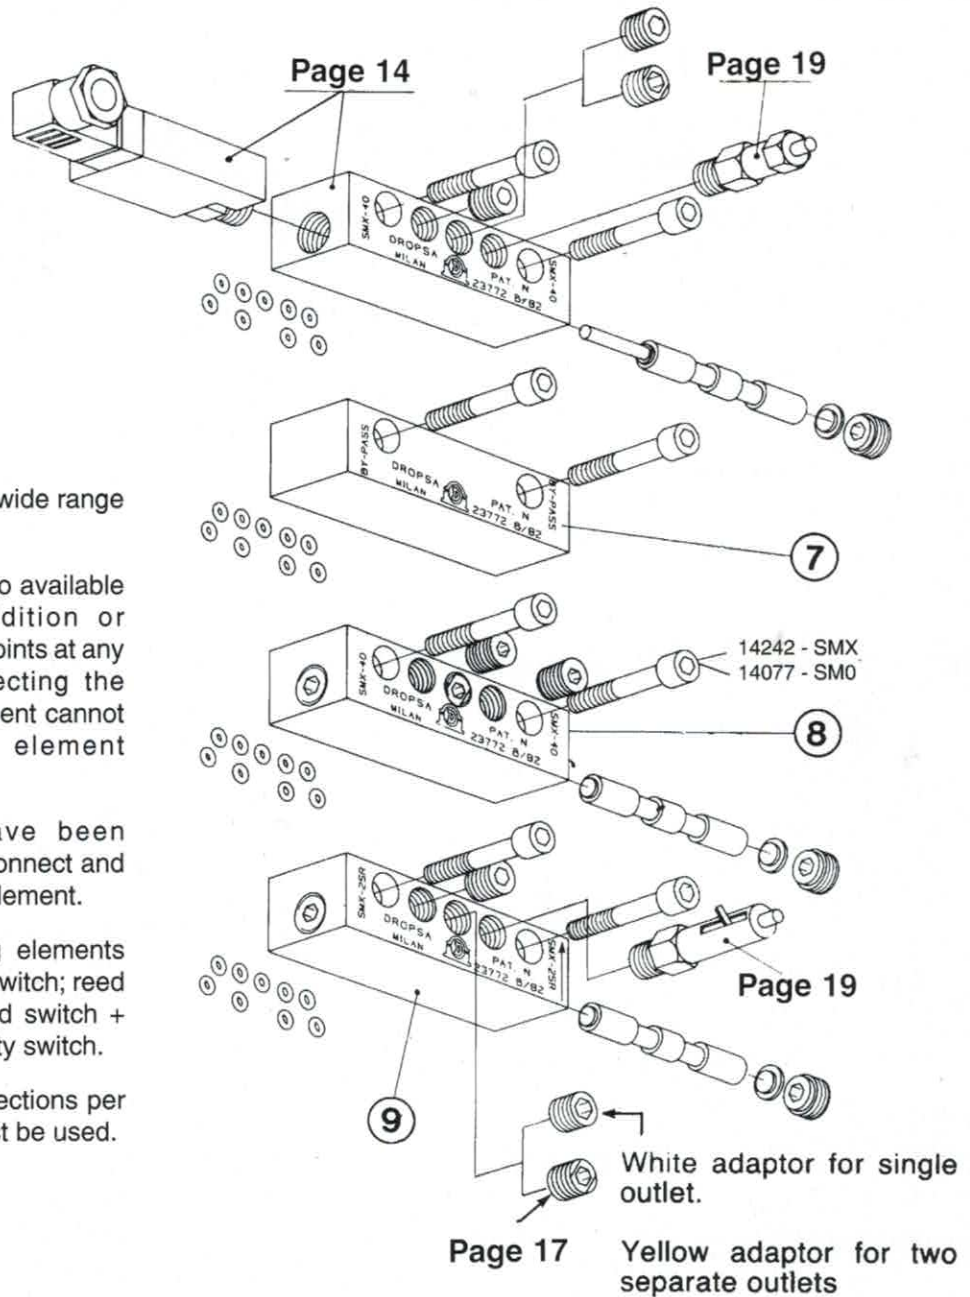

The element is set by the factory for two separate outlets with, yellow Adapter **Part No. 641709** included.

The white Adapter **Part No. 641708** should be ordered separately, see page 9.

All metering units including the by-pass element are fully interchangeable in the various positions