

Alarm Push Button for damp spaces

The alarm push button BTA-LK is available for wall mounting design and for fire alarm sections with closing functions.

To activate the alarm:
 BREAK GLASS and PRESS BUTTON


The button remains in depressed position.
 When the alarm is activated, the light diode on the push button lights up.

Resetting of the push button: Below the text "PUSH", there is a small plastic tab which shall be pressed to reset the push button. Do not forget to change the glass.

Fields of application: Warehouses, engine rooms on board vessels and other damp spaces in the industry.

The push button shall always be installed with the cable inlets downwards to prevent water from entering the box. It is important to make sure that the cable inlets are properly sealed after the installation.

This push button is also available with a constant light on the top. If so, this lamp must have its own two-core power cable.

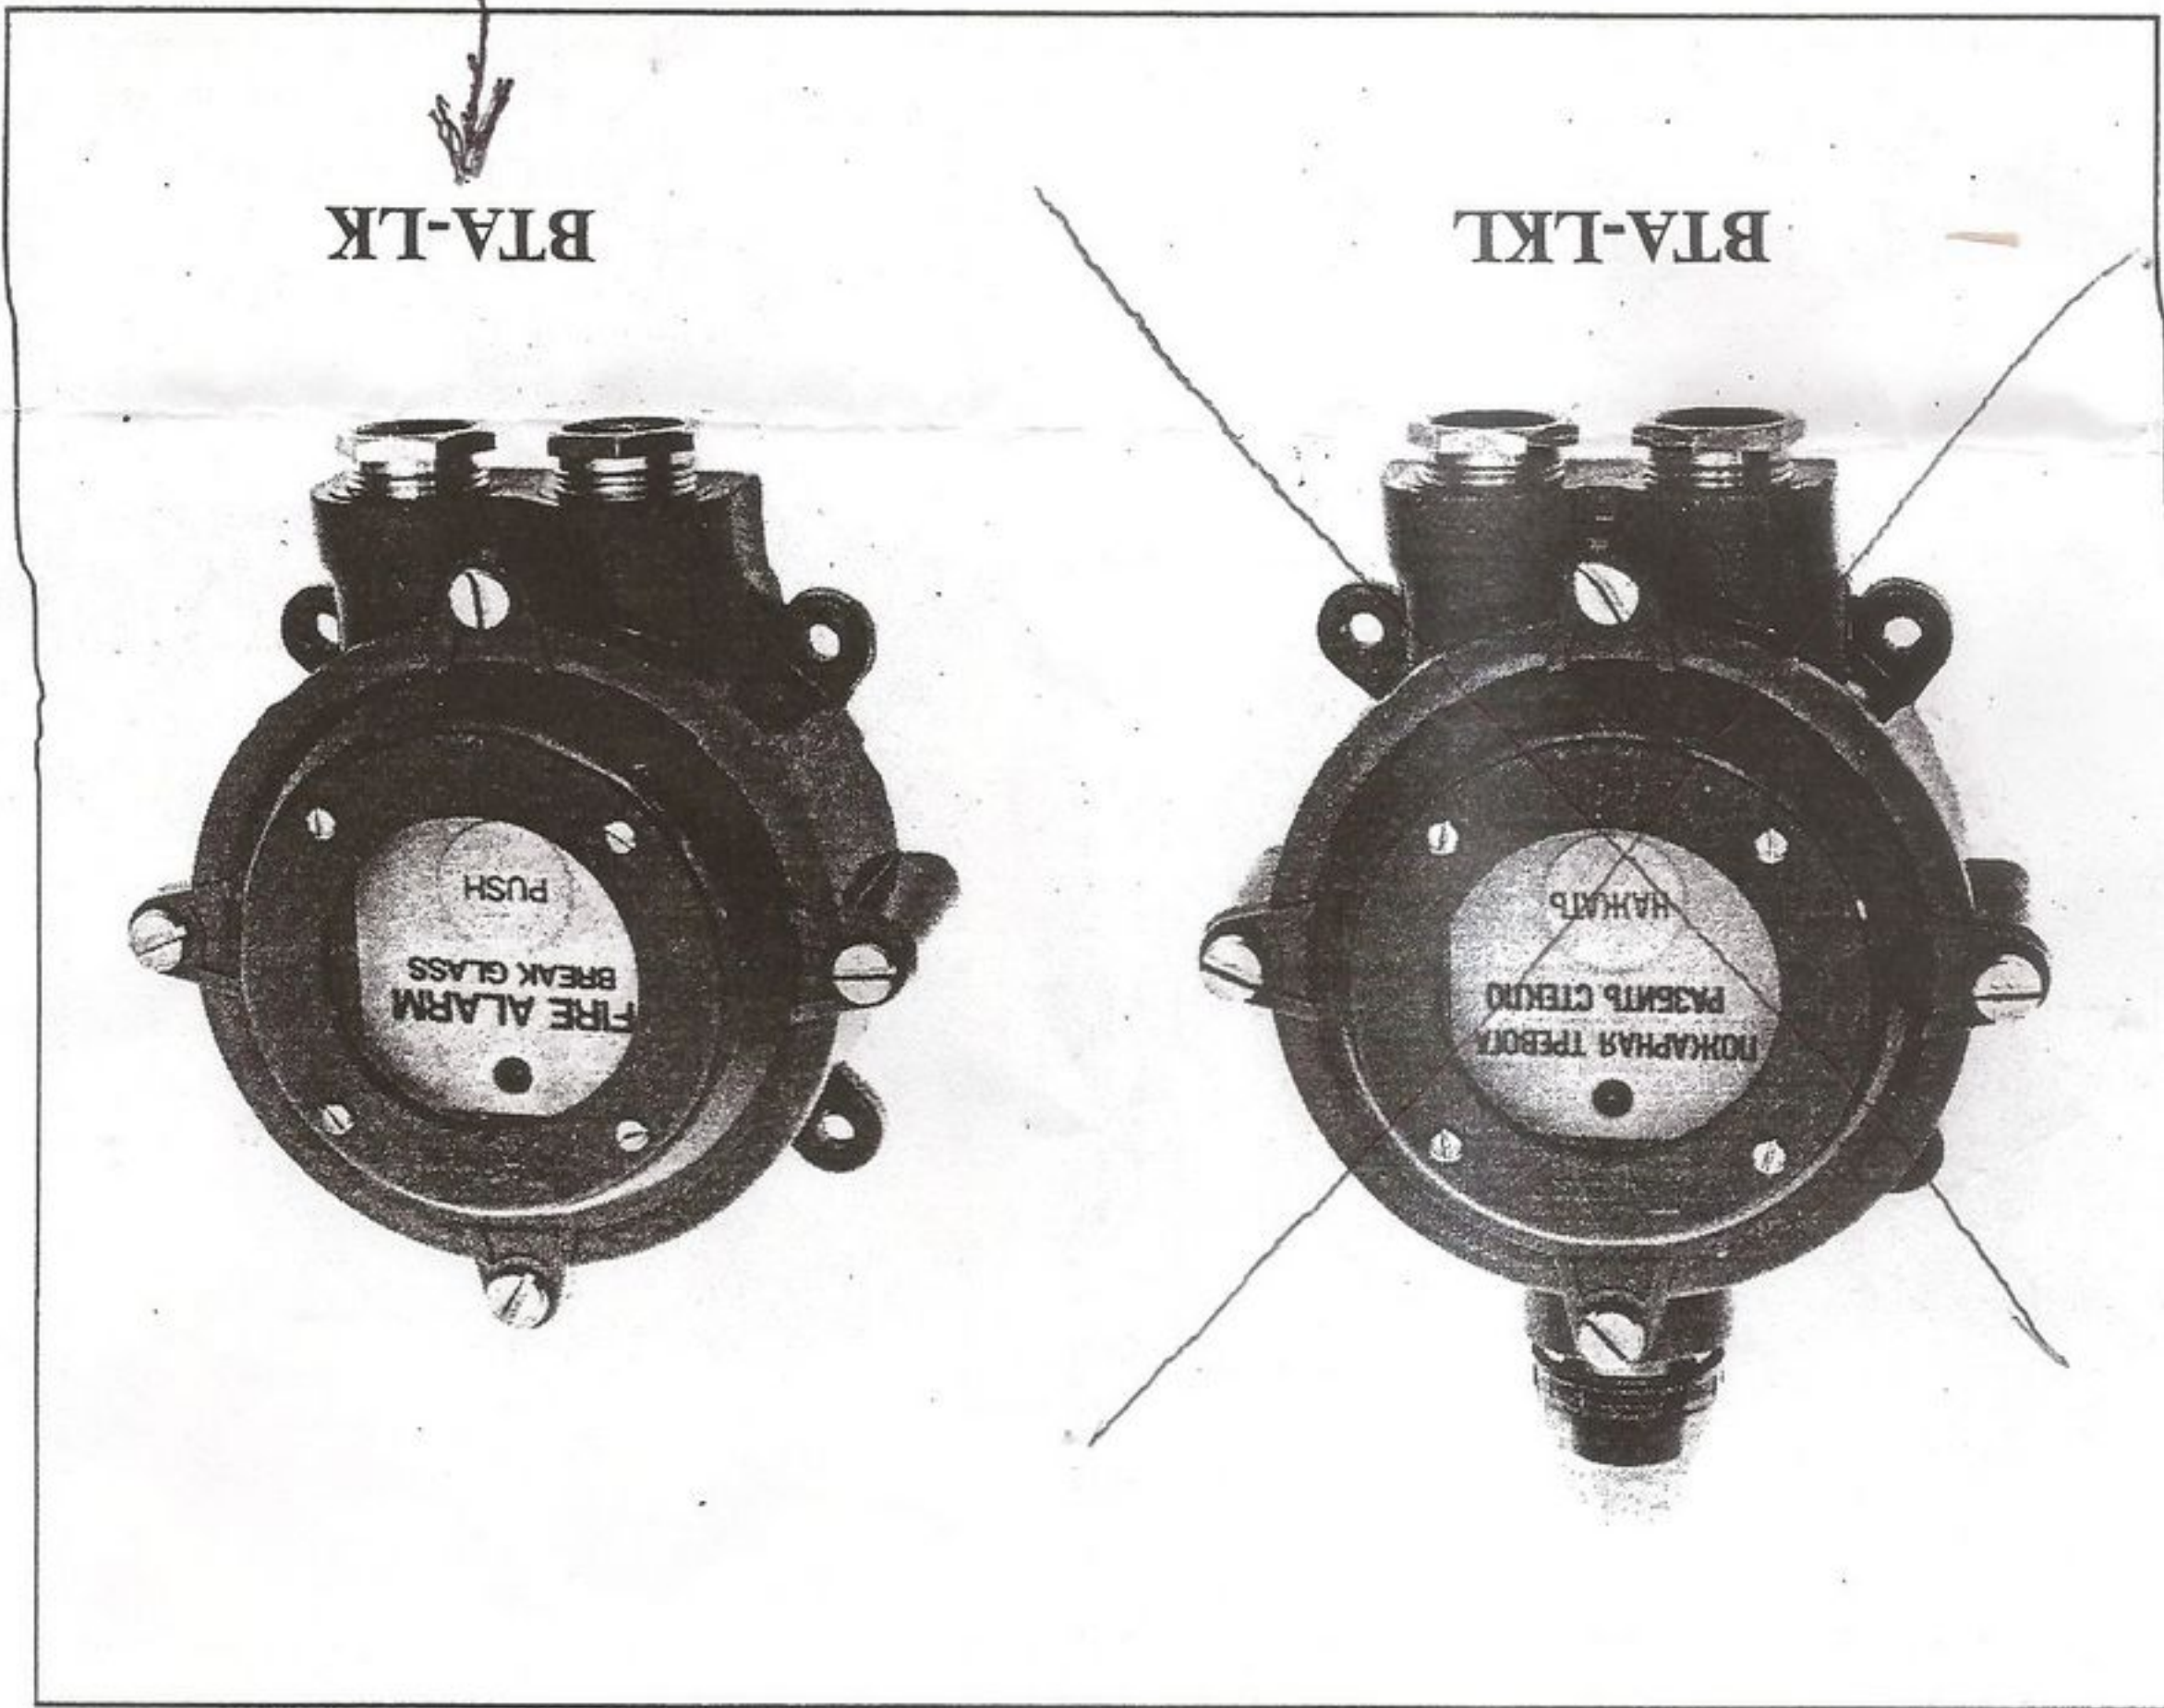

Alarm Push Button
BTA-LK/BTA-LKL

