



I/O Module for DeviceNet
8 digital npn inputs
FDNL-N0800-T

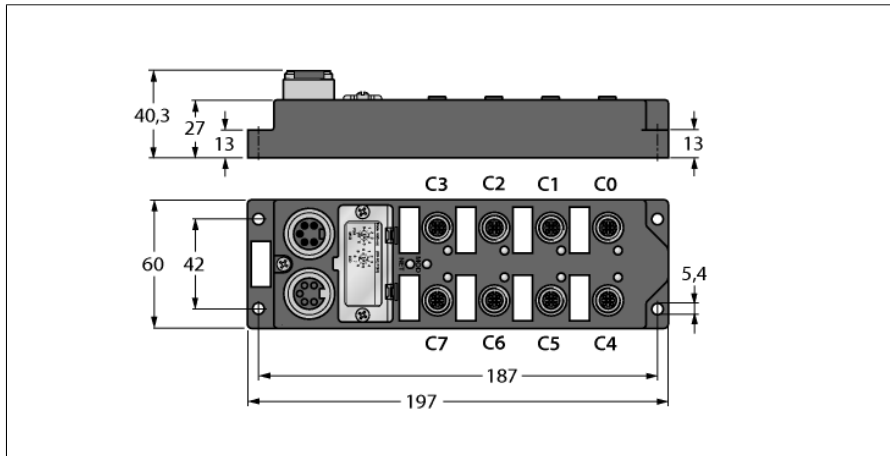


- 8 digital npn inputs
- Short-circuit monitoring
- Module-related diagnostics
- One channel per connector
- Glasfaserverstärktes PA6-Gehäuse
- Vibrations- und erschütterungsfest
- Vergossene Modulelektronik
- Metallsteckverbinder
- Schutzart IP67

Fieldbus



M12 × 1 Input



Type designation	FDNL-N0800-T
Ident no.	F0138
Number of channels	8
Operating / load voltage	11...26 VDC
Operating current	< 50 mA
Inputs	
Number of channels	(8) 3-wire npn sensors
Input voltage	13...26 VDC
Supply current	< 700 mA per module, short-circuit proof
Switching threshold	EN 61131-3
	low max.: 1.5 mA / high min.: 2 mA
Input delay	2.5 ms
Switching frequency	≤ 100 Hz
Max. input current	7 mA
Electrical isolation	galvanic isolation against the bus
Sensor supply	bus connection
Fieldbus transmission rate	125/250/500 kbps
Fieldbus addressing	0...63 (dezimal) über Drehcodierschalter
Electrical isolation	to operating and load voltage
Dimensions (W x L x H)	60 x 197 x 40 mm
Housing material	fibre-glass reinforced Polyamide (PA6-GF30)
Mounting	4 mounting holes Ø 5,4 mm
Ambient temperature	-40...+70 °C
Protection class	IP67
MTTF	341 years acc. to SN 29500 (Ed. 99) 20 °C
Approvals	CE, UL, CSA, FM

I/O Module for DeviceNet

8 digital npn inputs

FDNL-N0800-T

Data in process image

C1P4: Male Connector 1, 4-pole

IGS: Wire-break/ short circuit - group signal

		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Input	Byte 0	C7P4	C6P4	C5P4	C4P4	C3P4	C2P4	C1P4	C0P4
	Byte 1	IGS	-	-	-	-	-	-	-